#351

Schlumberger

Geological Survey

| | |
|---|---|
| COMPANY | CONTINENTAL OIL COMPANY |
| WELL | FEDERAL 32-33 |
| FIELD | WILDCAT |
| COUNTY | SUBLETTE |
| STATE | WYOMING |
| Other Services: | |
| Sec. 33 Twp. 31 N Rge. 115 W | |
| Permanent Datum: GL Elev. 6470 | Elevations: KB 6485 DF 6484 GL 6470 |
| Log Measured From: KB 15 Ft. Above Perm. Datum | |
| Drilling Measured From: KB | |
| Date: 1-4-70 | |
| Run No. ONE | |
| Depth-Driller: 1700 | |
| Depth-Logger: 1700 | |
| Bottom Log Interval: 1700 | |
| Top Log Interval: SURFACE | |
| Casing-Driller: 8 5/8 @ 1700 | |
| Casing-Logger: | |
| Bit Size: 7 7/8 | |
| Type Fluid in Hole: WATER | |
| Dens. Visc. | |
| pH / Fluid Loss | |
| Source of Sample: | |
| Rm @ Meas. Temp. | |
| Rmf @ Meas. Temp. | |
| Rmc @ Meas. Temp. | |
| Source: Rmf / Rmc | |
| Rm @ BHT | |
| Time Since Circ. | |
| Max. Rec. Temp. | |
| Equip. Location | |
| Recorded By | |
| Witnessed By | |
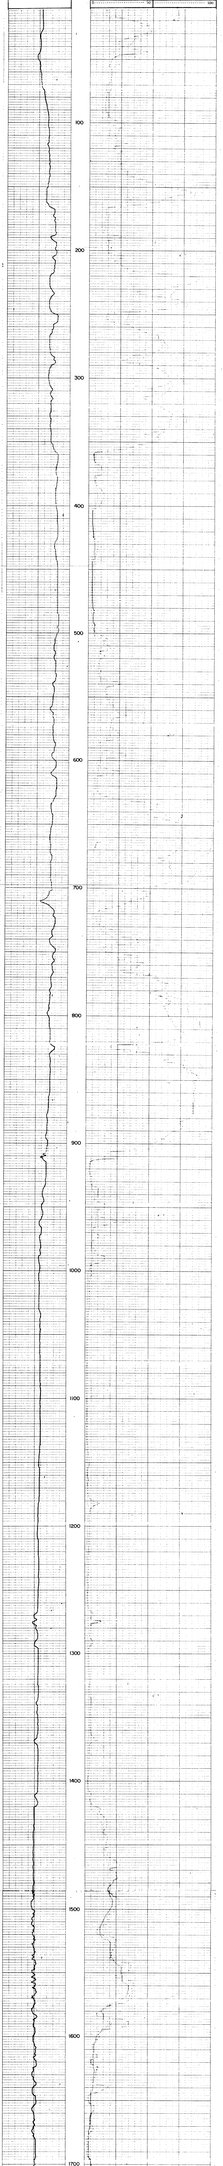
| SPONTANEOUS POTENTIAL millivolts | DEPTH | RESISTIVITY ohms, ohm-m |
|---|---|---|
| | | SHORT NORMAL 16" - 64" |
| | | LONG NORMAL 64" - 16' |