ELOG # ~~10~~ 74 D-31

Layne

Geophysical Survey

ELECTRIC LOG

COMPANY: Town of Smithville
Smithville, Mississippi

WELL: # 1442

FIELD:

COUNTY: ~~Ittawamba~~ Monroe STATE: Mississippi

Location: Sec. ~~A.A.~~ 6 Twp. 12 S Rge. 9E Ser. No.

Other Services:

Permanent Datum: G.L. Elev.
Log Measured From: 0 Ft. Above Perm. Datum
Drilling Measured From: G.L.

Elev.: K.B. D.F. G.L.

Date	05-08-80			
Run No.	1			
Depth-Driller	216'			
Depth-Logger	216'			
Btm. Log Inter.	40' - 216'			
Top Log Inter.	-			
Casing-Driller	@	@	@	@
Casing-Logger				
Bit Size	9-7/8"			
Type Fluid in Hole	Gel			
Dens. / Visc				
pH / Fluid Loss	ml	ml	ml	ml
Source of Sample				
Rm @ Meas. Temp.	@ °F	@ °F	@ °F	@ °F
Rml @ Meas. Temp.	@ °F	@ °F	@ °F	@ °F
Rms @ Meas. Temp.	@ °F	@ °F	@ °F	@ °F
Source: Rml Rms				
Rm @ BHT	@ °F	@ °F	@ °F	@ °F
Time Since Circ.	30 Minutes			
Max. Rec. Temp.	°F	°F	°F	°F
Equip. / Location	WIDCO Jackson			
Recorded By	Jon Palmer			
Witnessed By	Dave Cook			

Fold Here

RESISTIVITY ohms. m²/m — LATERAL AO = 18'8" — 800

RESISTIVITY ohms. m²/m — SHORT NORMAL AM = 16" — 400 — LONG NORMAL AM = 64" — 400

Depths

SPONTANEOUS POTENTIAL millivolts — 16 MV

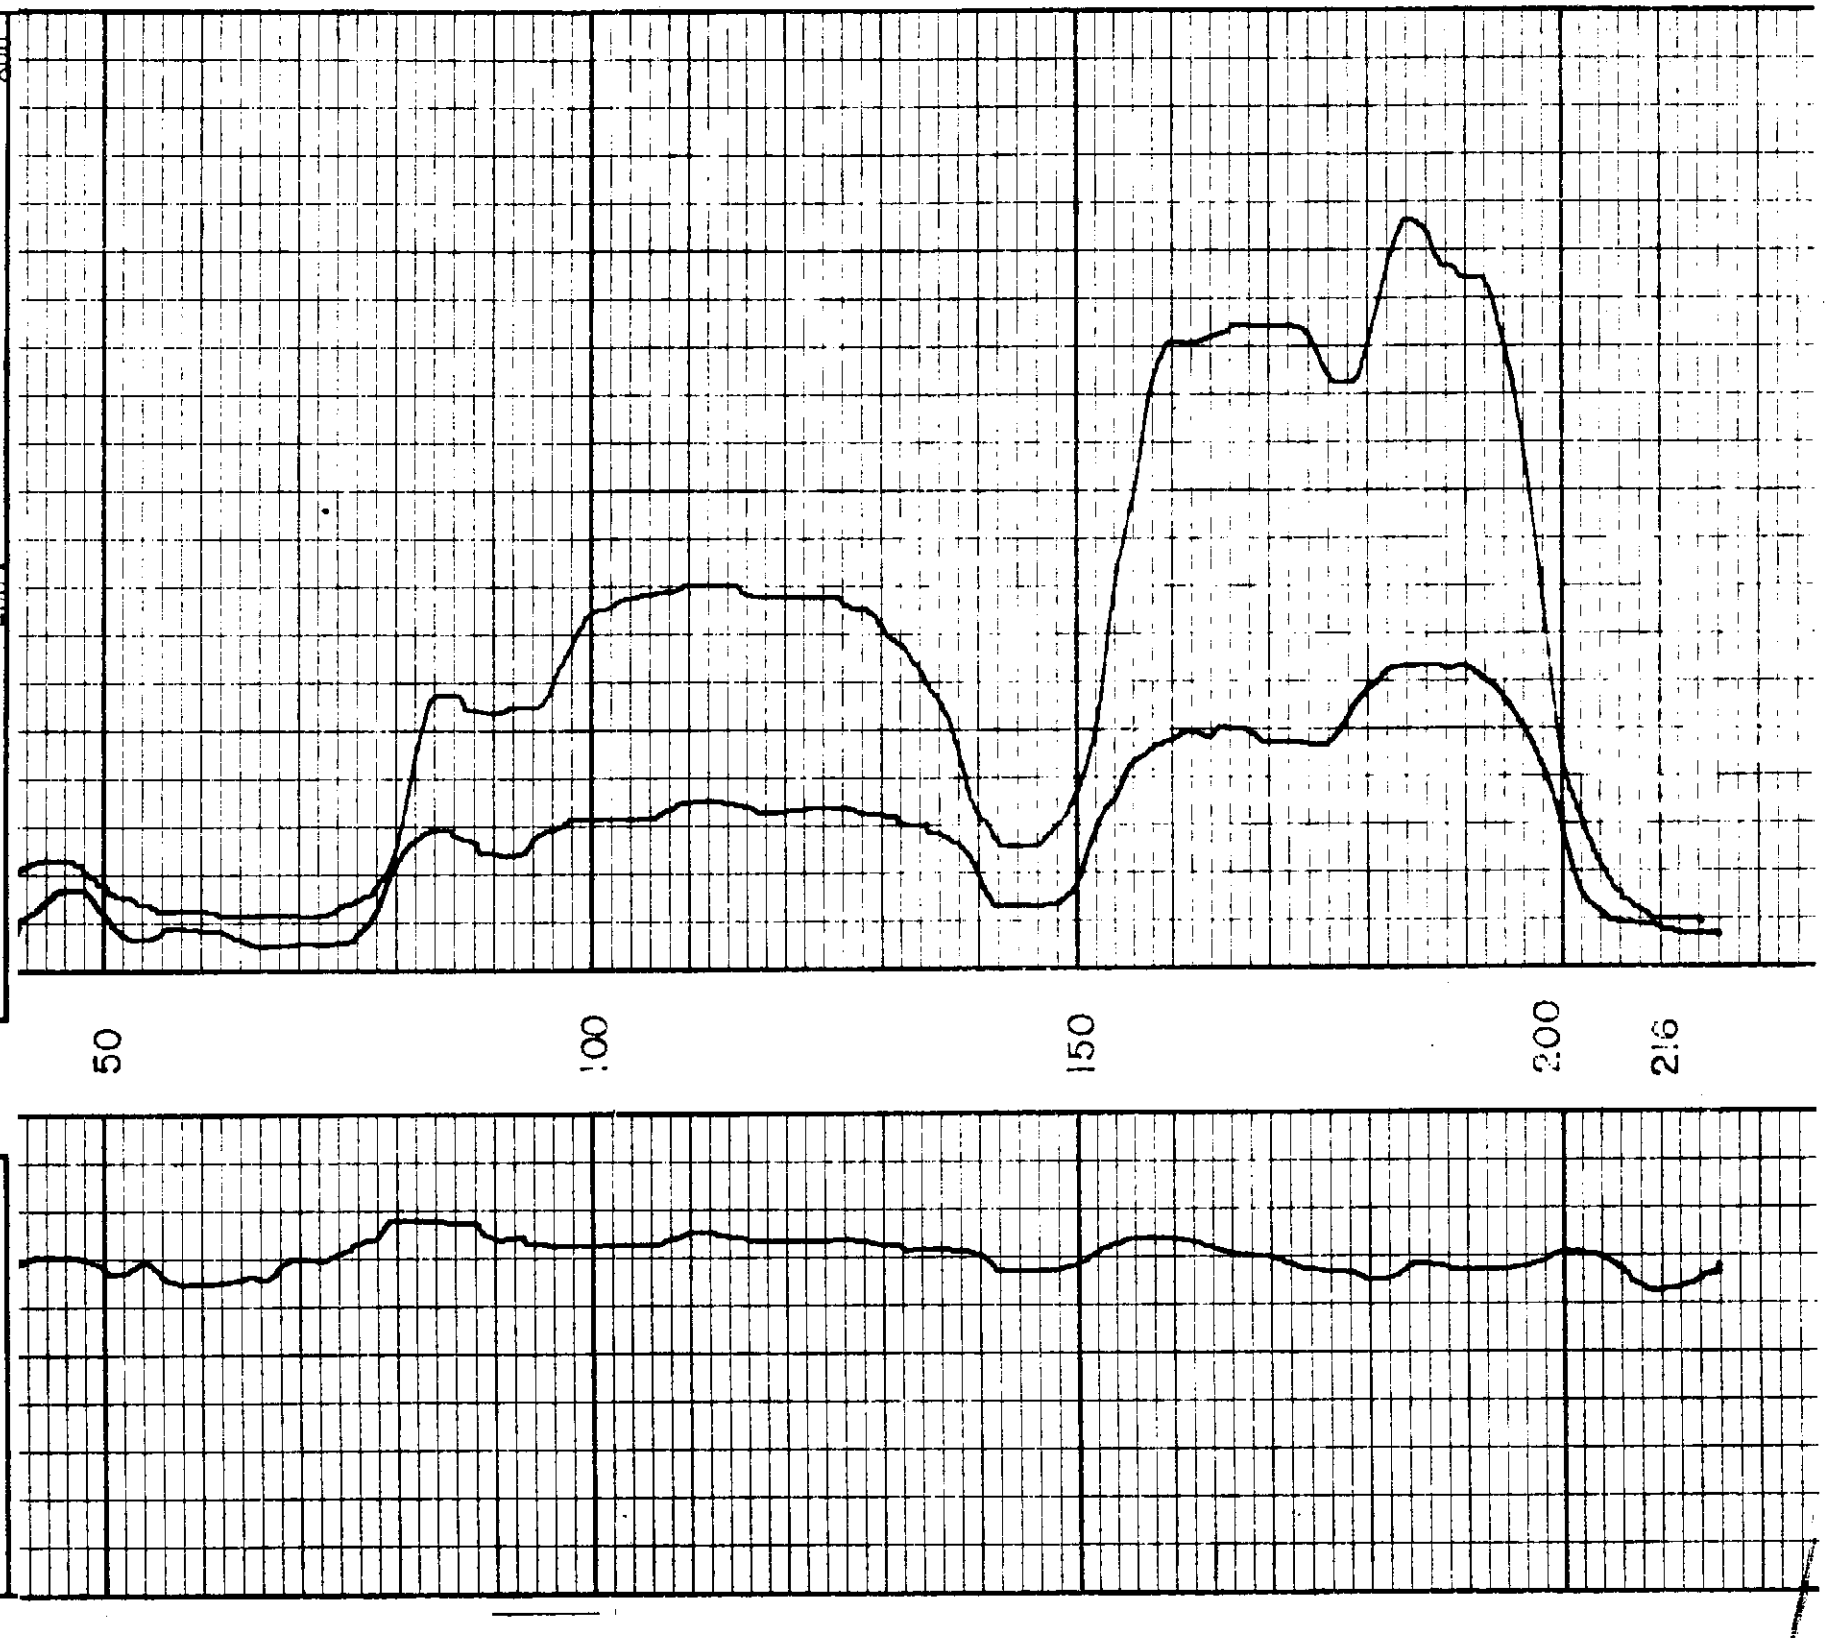

GORDO 32'